

Assembling Your Fountain

Caution: Keep children and others from climbing, sitting, or leaning on the fountain and its components. Failure to do so could cause serious injury. Fountains have no interlocking component parts. Fountain parts are held by gravity only.


ASSEMBLY INSTRUCTIONS:

1. Place basin feet on level, firm foundation.
2. Place basin on feet. Use shims to level basin if necessary.
3. Insert fountain back into basin guides, and shim if necessary.
4. Feed pump cord thru "A" (bottom hole), insert power cord into cord plug slot. Insert cord plug firmly into opening "A" and seal with silicon.
5. Insert plug w/hose into "B"(top hole) and seal with silicon. Use about 6" of supplied hose to connect plug w/hose to pump.
6. Cut a 23" length from supplied hose.
7. Attach one end of hose to plug w/hose "B" and other end to "T" connector straight thru end.
7. Cut 3" length from supplied hose. Attach to bottom of "T" and plug w/hose. Insert plug w/hose firmly into opening "C" and silicon.
8. Take remainder of supplied hose and attach one end to "T". Slide clamp over hose, and close clamp 80%. Then attach to plug w/hose. Insert plug w/hose firmly into opening "D" and silicon.
8. Add enough water into basin to cover pump inlet.
9. Cover pump with pump cover.
10. Make sure that clamps are almost completely closed. Then apply power. (GFI Outlet recommended). Adjust clamps to all designed flow of water.

MATERIALS LIST:

- | | |
|-------------------|-------------------|
| 1 - Clamps | 1 - Cord Plug |
| 1 - "T" Connector | 54" - 5/8" Hose |
| 1 - Pk Shims | 3 - Hose Adapters |

It is recommended that silicon (Not Included) be used around all plugs. All to set before adding water .

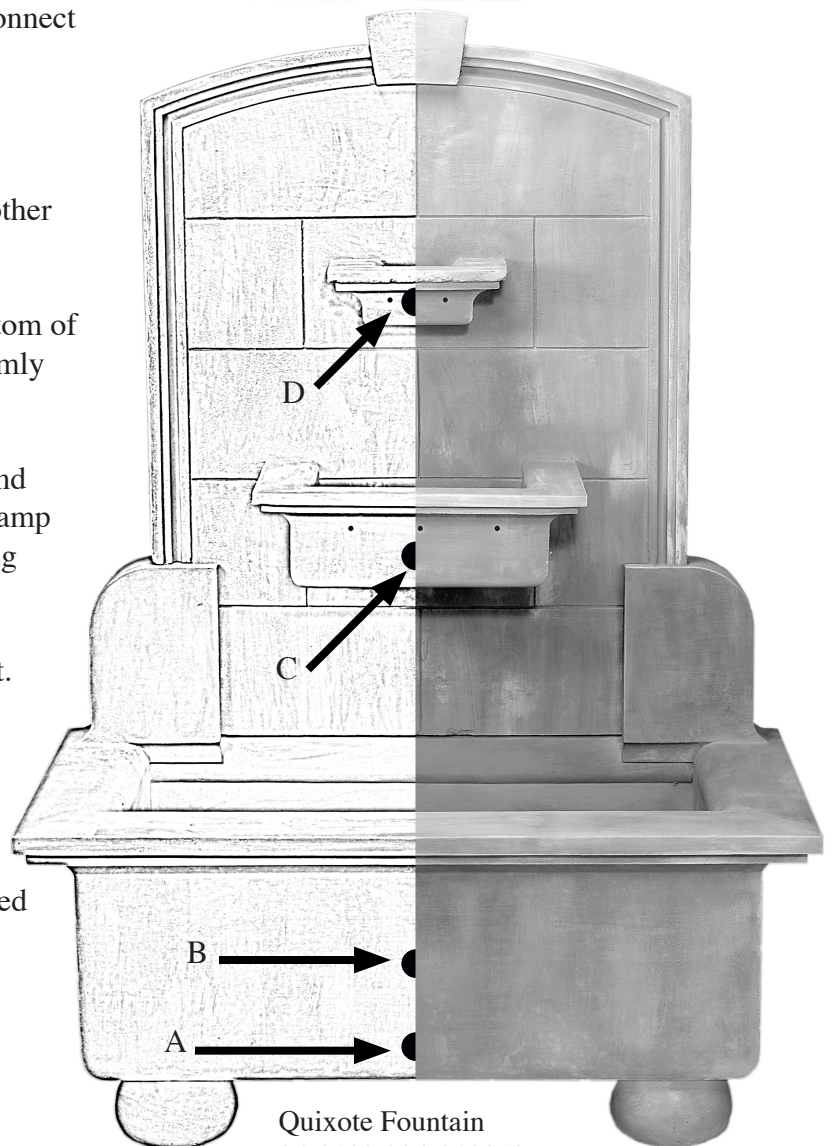

Quixote Fountain
04-9100 / 04-910013